


AQL

Installation Manual

Scope of delivery


- 1x AQL
- 1x Mounting kit with 2x mounting clips + 2x screws
(optionally with 1x mounting plate + screws)
- 1x AQL Installation Manual



Technical Data

Power	10 - 68 W
Operating voltage	230 V AC / 50 - 60 Hz
Type of luminaire	Surface-mounted luminaire
LED Type	SMD
Control	No
Light efficiency	Up to 118 lm / W
Color consistency	3 SDCM
Lifetime	L70 B10 50.000 h @ 25°C
Ambient temperature	-40°C to +40°C
Housing	Polycarbonate
Swivel/tilt angle:	--- / ---

Further specifications can be found in the corresponding product datasheet.

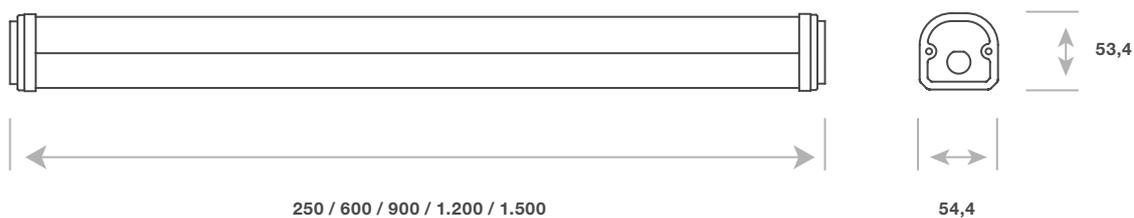

IK08: Only when using the luminaire with a mounting plate

Safety & Warning Instructions

Read the user manual carefully and keep it in a safe place.

Installation must only be carried out by an authorized electrical professional.

Check for any damage before commissioning. If electrical components or the cover are damaged, do not operate the luminaire.

Do not open the luminaire housing. Any modifications will void the warranty.

Ensure the luminaire is disconnected from power before cleaning. Use a soft, dry cloth without cleaning agents. For stubborn stains, a slightly damp cloth may be used. Do not use abrasive or corrosive substances.

Before electrical installation or cleaning, disconnect the luminaire from the power circuit and secure it against being switched on again.

We do not assume liability for any material or personal damage caused by improper handling or modifications to the product.

The luminaire corresponds to Protection Class II.

Installation Instructions

Installation work may only be carried out by trained professionals.

Remove the luminaire from the packaging and check for any damages.




Ensure the power is off before and during installation.

The minimum distance between the luminaire and flammable materials must not be less than 0.2 m.

When routing and connecting cables, ensure that cables and plugs are free of tensile forces.

Mount the luminaire using the supplied mounting clips or mounting plate on a solid surface.

Mounting with Mounting Clips

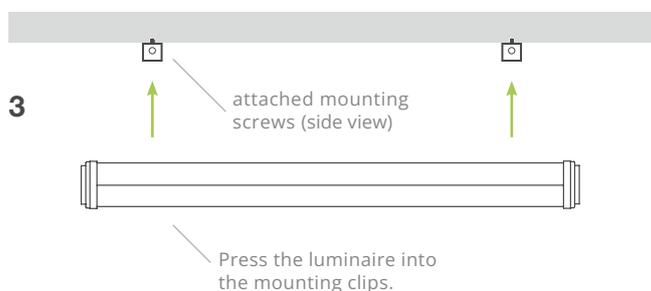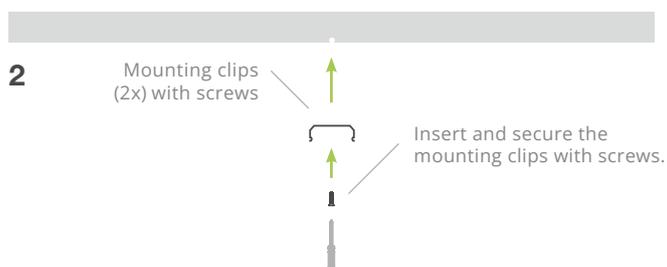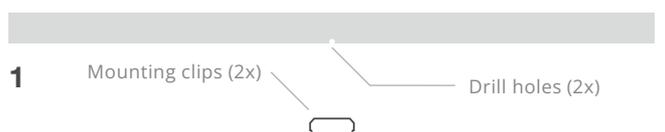

Mounting with Mounting Plate

