


## TECHNICAL DATA

Power	15 - 28 W
Operating voltage	24 V DC
Type of luminaire	light strip
LED Type	SMD
Control	PWM
Light efficiency	up to 111 lm/W
Colour consistency	SDCM3
Lifetime	L80 B10 50.000 h @ 10°C
Ambient temperature	-30°C to +10°C
Material	aluminium/PC
Cascading	no
Warranty	5 years
Scope of delivery	0,10m Connection cable female (integrated)




## TYPES




Housing colour:  white

## DIMENSIONS (mm)

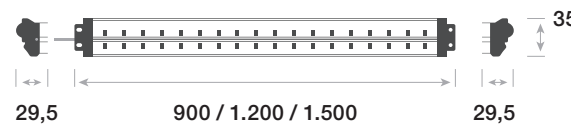

## BEAM ANGLE




## HIGHLIGHTS

- cost effective retrofit system
- especially for refrigerated cabinets -30° to +10° (IP 65)
- flexible integration with multiple accessories
- brilliant light with CRI 90

## APPLICATIONS LCR-CD

Mounting in the furniture head, for illumination of the top shelf and the entire front of the goods.

- Refrigerated multideck cabinet (open / closed)
- Freezer
- Combi Freezer



## STANDARDS LCR-SERIES

IEC 60598-1-2014

IEC 60598-1-2014/AMD1:2017

IEC 60598-2-1-2020

IEC 60335-1-2010

IEC 60335-1-2010/AMD1:2013

IEC 60335-1-2010/AMD2:2016



IEC 60335-2-89:2010

IEC 60335-2-89:2010/AMD1:2012

IEC 60335-2-89:2010/AMD2:2015

Item number	Productcode	Power	Light colour Ledxon	CRI	Luminous flux	Beam characteristic	Length
9100677	LCR-L900-940-CD	15 W	4000 K	90	1665 lm	Canopy Doublebeam	900 mm
9100678	LCR-L900-957-CD	15 W	5700 K	90	1665 lm	Canopy Doublebeam	900 mm
9100679	LCR-L900-FM-CD	15 W	Fresh meat	90	1355 lm	Canopy Doublebeam	900 mm
9100680	LCR-L1200-940-CD	20 W	4000 K	90	2220 lm	Canopy Doublebeam	1200 mm
9100681	LCR-L1200-957-CD	20 W	5700 K	90	2220 lm	Canopy Doublebeam	1200 mm
9100682	LCR-L1200-FM-CD	20 W	Fresh meat	90	1895 lm	Canopy Doublebeam	1200 mm
9100683	LCR-L1500-940-CD	28 W	4000 K	90	3108 lm	Canopy Doublebeam	1500 mm
9100684	LCR-L1500-957-CD	28 W	5700 K	90	3108 lm	Canopy Doublebeam	1500 mm
9100685	LCR-L1500-FM-CD	28 W	Fresh meat	90	2720 lm	Canopy Doublebeam	1500 mm

## ACCESSORIES

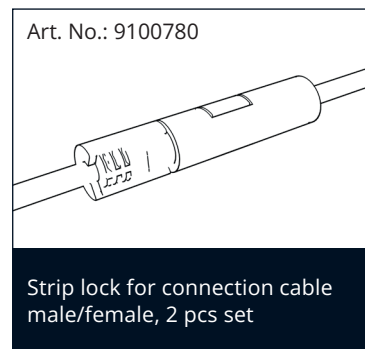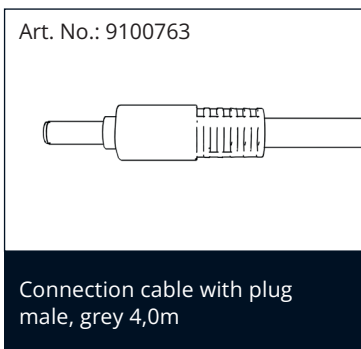

Item description	Item number
Connection cable plug male, grey 4,0m	9100763
Strip lock (plug) Connection cable male/female, 2 pcs set	9100780

**IMPORTANT NOTES**

All technical parameters apply to the entire product. Due to the complex manufacturing process of light emitting diodes, the specified typical LED parameters are only purely statistical values and may deviate.

The specified type of use must be strictly adhered to. Deviations may affect the stability of the fixture. Please observe the information in the mounting instructions before using the products.

<b>Mercury content</b>	0,0 mg
<b>Mercury-free</b>	yes
<b>Professional disposal according to WEEE</b>	yes

**NOTES TO THE LIFE TIME**

Decisive factors for the life time are the ambient temperature and the operating temperature (Tc). Exceeding the permissible limits results in a substantial reduction of the lifetime and can even lead to the destruction of the products. The specified lifetime represents a statistical quantity.

**NOTES TO ELECTRICAL AND PHOTOMETRIC DATA**

Colour coordinates according to CIE 1931

Rated ambient temperature:  $t_a = 25^\circ$

Measuring tolerance colour coordinates (x/y) +/- 0,005

Tolerance range of electrical / photometric data: +/- 10%

**DISCLAIMER**

Changes and errors excepted. Due to the continuous development of all products, technical and design changes can occur at any time. Make sure that you always use the latest version of the data sheet.

Further product data as well as current information can be found at [www.lxpro.pl](http://www.lxpro.pl)

**5 YEARS**  
WARRANTY

